



**Valve 2/2 way - angle seat/process valve
N.C. - Flow direction below the seat -
pneumatically operated**

**21IA4T15NC2-A
÷
21IA9T50NC2-A**

PRESENTATION:

- High flow rate due to the angle seat configuration.
- Anti-water hammer feature with the fluid entry below the seat.
- Electrical operation is easy with the addition of a solenoid pilot.
- Stainless steel body and corrosion resistant actuator.
- The pneumatic actuator can be rotated through 360 degrees.
- Optical position indicator.
- Internal seals are self adjusting for long life.
- Easily convertible from N.C. to N.O. or double acting.
- Universal mounting - any mounting orientation is acceptable.

USE: Automation, Heating, Water, Hot water, Steam (180°C), Aggressive and food fluids


PIPES: 1/2 NPT - 2 NPT

VALVE FEATURES:

Fluid Temperature - 40°C + 180°C
 Ambient temperature - 10°C + 80°C
 (according to Atex requirements)
 Viscosity of the fluid max 600 cSt
 Material Stainless steel AISI series 316
 Seal PTFE
 Packing gland PTFE, FKM

PILOT ACTUATOR FEATURES:

Fluid Dry Air or lubricated, gas and neutral fluids
 Fluid Temperature max + 60°C
 Body Polyamide 66 with 30% glass fibre
 Gaskets NBR
 Actuator Ø 70



Pipe ANSI/ASME Bl.20.1	Code	Ø mm	Kv	Actuator pilot pressure (bar)		Differential pressure (bar)		Max. allowable pressure PS (bar)	Weight Kg
			l/mn	min	max	min	max		
1/2 NPT	21IA4T15NC2-A	15	80	4	10	0	16	40	1,4
3/4 NPT	21IA5T20NC2-A	20	150				10		1,5
1 NPT	21IA6T25NC2-A	25	190				10		1,8
1 1/4 NPT	21IA7T32NC2-A	32	340				7	25	2,4
1 1/2 NPT	21IA8T40NC2-A	40	430				4,5		2,7
2 NPT	21IA9T50NC2-A	50	620				3	16	3,9



CE Approval

(Pressure Equipment Directive 2014/68/EU)
for Valve 21IA7..-A ÷ 21IA9..-A

According to Directive 2014/34/EU ATEX



II 2G c IIC TX
(- 40°C ≤ Tamb ≤ 80°C)


Note

Available on request pilot series S.V. 31A2 according to Atex requirements (see catalogue page) | Together with male thread nipple male 1/4 NPT - 1/4 NPT | Material compatibility with the fluids to be checked.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notice.

MAINTENANCE KIT:

1.
 - 1/2 NPT R500045
 - 3/4 NPT R500048
 - 1 NPT R500051
 - 1 1/4 NPT R500054
 - 1 1/2 NPT R500057
 - 2 NPT R500060

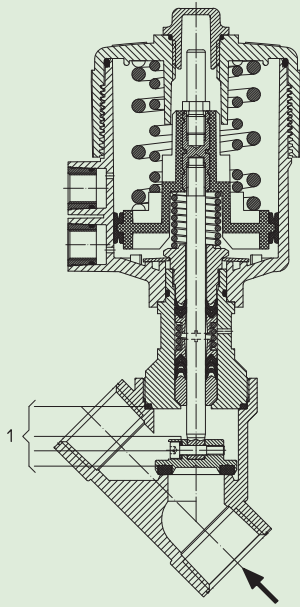

DIMENSIONS:

Pipe ANSI/ASME B1.20.1	A mm	B mm	C mm	D mm	H mm	L mm	T mm
1/2 NPT	206,8	SW 27	178,7	15,4	163,3	65	17
3/4 NPT	211,7	SW 32	188,6	21,9	166,7	75,5	19
1 NPT	220,1	SW 41	197,8	25,1	172,7	90	21
1 1/4 NPT	235,9	SW 50	212,3	28,5	183,8	110	24
1 1/2 NPT	238,9	SW 55	217,0	31,0	186	122	25,2
2 NPT	247,8	SW 70	229,7	37,5	192,2	151	28,5

